

Hose Washer &
Hold Down Ring
(Included)

This Space for Architect/Engineer Approval



Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

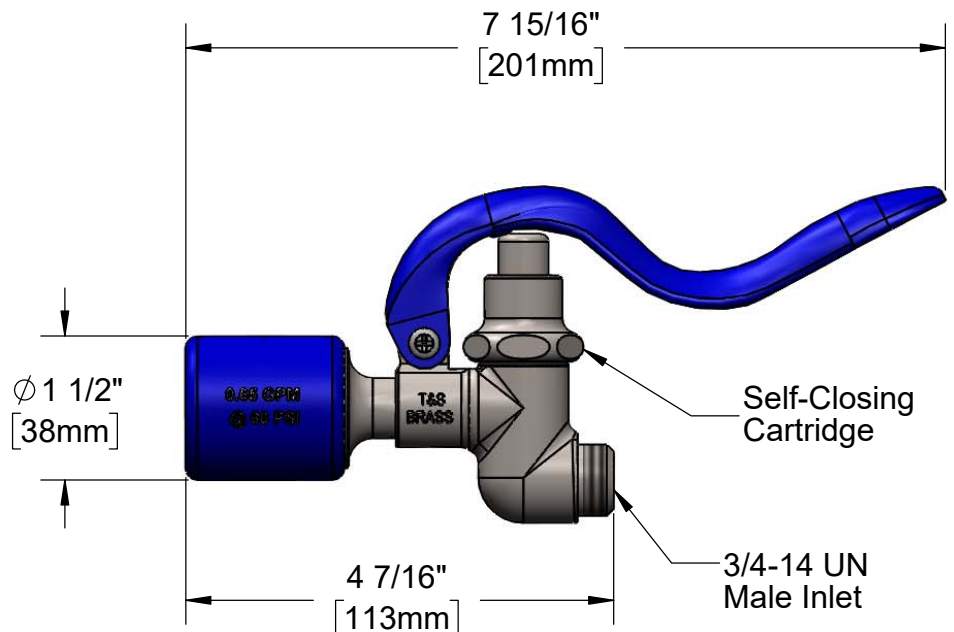


Flow Rate: 0.65 GPM (2.46 L/min) @ 60 psi
Spray Force: 4.4 Ozf (125 Gramf) @ 60 psi

Product Specifications:
Blue Self-Closing Stainless Steel Pre-Rinse Spray Valve,
0.65 GPM Spray Nozzle

Product Compliance:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class I



ITEM NO.	SALES NO.	DESCRIPTION
1	003199-45	Spray Valve Handle Screw
2	003198-45	Spray Valve Handle Nut
3	S010594-30	Bonnet, SS Spray Valve
4	011454-45	Spray Valve Handle - Blue
5	S003128-30NS	Short Low-Flow PRSV Nozzle
6	011499-45NS	Short Blue Shield Low Flow 0.65 GPM
7	010476-45	#27 Washer
8	S000907-30	Spray Valve Hold Down Ring

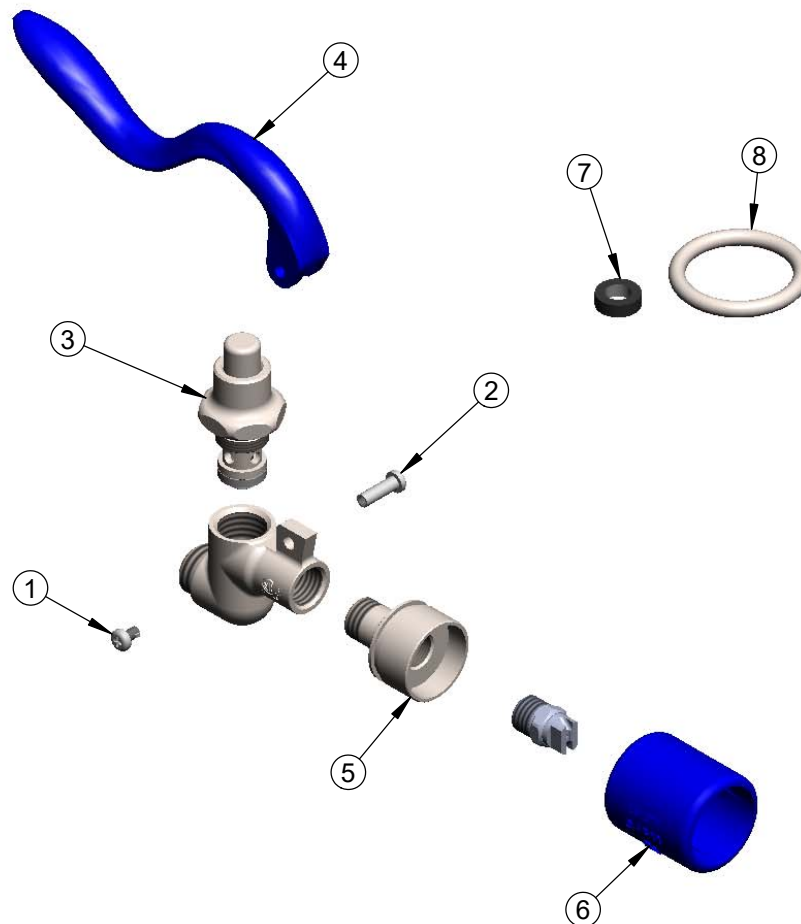

Product Specifications:
Blue Self-Closing Stainless Steel Pre-Rinse Spray Valve,
0.65 GPM Spray Nozzle

Product Compliance:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
2019 DOE PRSV - Class I