
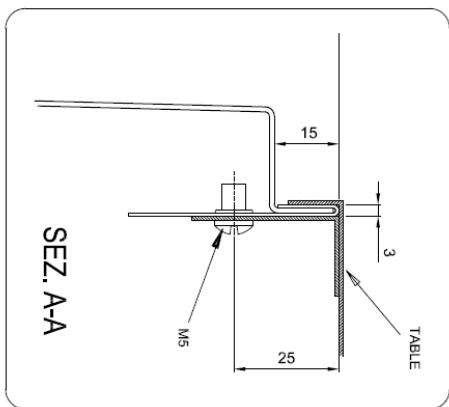
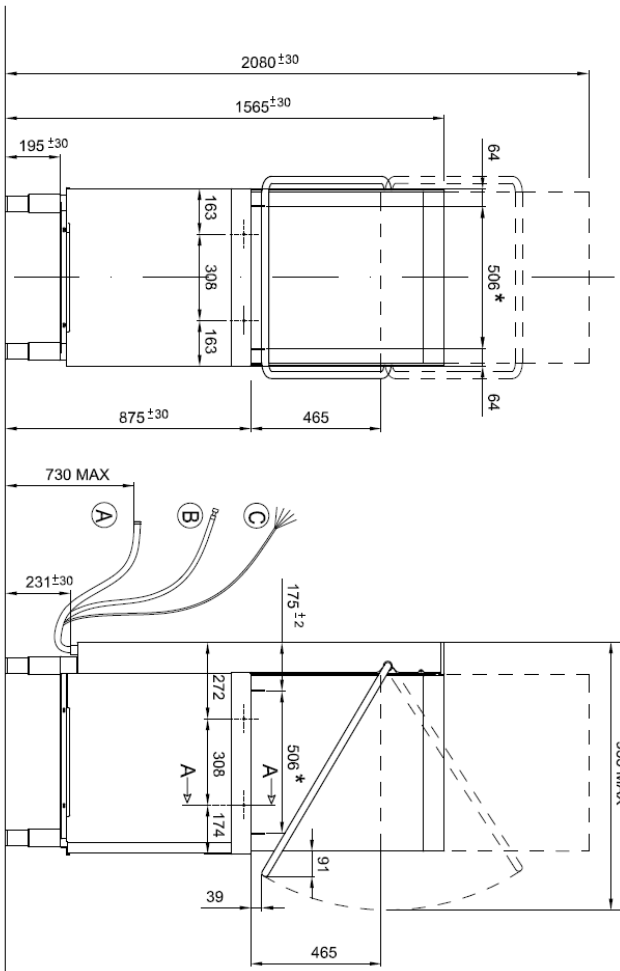


		Model	EW800-6	
		Code Production	TT3823EWNZDD	
		Interface :		
				
				
	Overall Dimension (Width-Depth-Height) *open	mm	721 - 836 - 1565(*2080)	
	Packaging Dimension (WxDxH)	mm	870x760x1540	
	Gross weight	Kg	120	
	Net weight	Kg	110	
	Volume	mc	1,02	
	Rack size	mm	500x500	
	Max door /hood opening	mm	465	
	Max glasses/plate Height	mm	440	
	General construction		double skin	
	Door/hood Construction		single skin	
	Tank construction		deep drawn	
	Tank volume	liter	22	
	Tank heating element	W	2.500	
	Tank surface strainers		Yes- composite	
	Wash pump type		double flow	
	Wash pump power	W	700	
	Wash temperature	°C	60	
	Boiler type		without pressure	
	Boiler volume	liter	12	
	Back-flow system		break tank	
	Boiler heating element	W	6.000	
	Rinse booster pump		yes	
	Rinse booster pump power	W	200	
	Rinse temperature	°C	80	
	Rinse water consumption	Liter /rack	1,9	
	Optimal external water pressure	bar	1 - 4	
	Drain system		deep drain	
	Drain pump		standard built in	
	Rinse aid dispenser	peristaltic	YES	
	Detergent dispenser	peristaltic	YES	
	Wash cycle	sec	60 - 120 - 150 - continuous	
	Self cleaning		YES	
	Automatic drain		NO	
	Electric Power	W	6.700	
	Electric Connection	V - ph - Hz	400V 3N 50Hz	
	Fuse	A	16	
	Plates racks	n° 1	780131	
	Flat Rack	n° 1	780132	
	Cutterly Rack	n° 1	780139	
	Electric cable	n° 1	YES	
	Drain hose	n° 1	YES	
	Fill hose “ WaterMark”	n° 1	YES	

A		Ø 32 mm
B		G 3/4"
C		Power supply

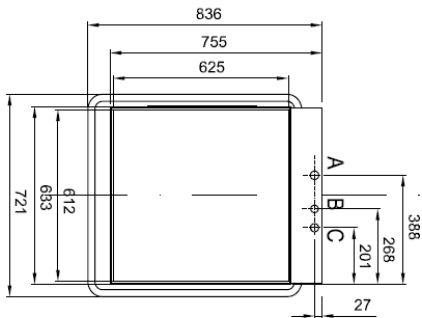

* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE UTILE POUR PANIER
NUTZBARER OFFENUNG FÜR KORBE
ABERTURA UTIL. PARA CESTO

Installation layout		Hood type with drain pump	
Designed by:	M.PUCCI	Date:	03.12.2013
Denomination:			
Code:	73991	Rev.:	01
			

